

YOUYI

Professional Tools

YANGZHOU CITY YOUYI TOOLS MANUFACTURING CO., LTD.
揚州市郵誼工具製造有限公司

XINSHUN(GAOYOU) MACHINERY MANUFACTURING CO., LTD.
高郵市鑫順機械製造有限公司



www.yzyouyi.com

> **WE ARE MANUFACTORY** >

YANGZHOU CITY YOUYI TOOLS MANUFACTURING CO., LTD.
揚州市郵誼工具製造有限公司

XINSHUN(GAOYOU) MACHINERY MANUFACTURING CO., LTD.
高郵市鑫順機械製造有限公司

Plant 1: East Ring Road, Gaoyou City, Jiangsu Province, China
工廠1:江蘇省高郵市東外環路

Plant 2: Tongxin Road, Industrial Development Zone Of Gaoyou Town, Gaoyou City, Jiangsu Province, China
工廠2:江蘇省高郵市高郵鎮武安工業集中區同心路

Tel: (86) 514-84548551 Fax: (86) 514-84542668

Zip: 225600 Email: info@yzyouyi.com

YANGZHOU CITY YOUYI TOOLS MANUFACTURING CO., LTD.
揚州市郵誼工具製造有限公司
XINSHUN(GAOYOU) MACHINERY MANUFACTURING CO., LTD.
高郵市鑫順機械製造有限公司

***THE INTEGRITY OF
THE WORLD*** 誠信天下





Company Introduction

公司簡介



Yangzhou City Youyi Tools Manufacturing Co.,Ltd.&Xinshun(Gaoyou) Machinery Manufacturing Co.,Ltd. in Yangzhou City are company which integrate the research,design,development, manufacture and marketing of power tools such as drill press, Wood mortising Machine and cutting tools like broaches,hobs.

With 50,000 m² in floor area,one located in the East ring road of the historical and cultural city,Gaoyou.The other is located in Tongxin road in Gaoyou industrial development region.The Company possesses more than 230 staff at present.Among them,there are over 40 engineering and technical personnel with senior technical qualifications.With strong technical know-how,the company staff are experienced in the production of power tools and cutting tools.The modern enterprise resource management is equipped with SolidWorks and ANSYS to further improve the efficiency and ensure the quality.

The company has passed the ISO9001 Certification Quality Management System. Concerning the management, the company has also introduced relevant software to the standardize management. The product testing center is equipped with a wide range of testing instruments and the quality control is being perfected day by day. This series of effective management systems can guarantee the productivity of over 100,000 machines each year. At present, the 13mm, 16mm, 20mm, 25mm and 32mm series of drill press are sold to over 70 countries and regions and are highly praised by the customers.

The motto of the company is 'honesty and quality'. Director of the Board, Mr. Zhou Qifu warmly welcome domestic and international businessmen to visit the company and talk about business, develop extensive cooperation, and create a wonderful future together.

揚州市郵誼工具製造有限公司和鑫順機械製造有限公司是集產品開發、設計、加工、生產、銷售為一體的公司。公司座落于歷史文化名城江蘇省揚州市，下屬兩個分公司，分別是電動工具公司和齒輪切削刀具公司。本公司技術力量雄厚，擁有高級技工40多名，工人230多名，在臺式鑽床等電動工具產品的開發方面有着成熟的經驗。

目前我公司主要生產13mm、16mm、20mm、25mm、32mm系列臺鑽，切割機等產品遠銷70多個國家和地區，面向歐洲、澳洲、美洲、東南亞、中東等地區。

我司的產品制作流程，嚴格按照行業技術規範。從設計，選材，加工、組裝、檢驗，每道環節都有着嚴謹而周密的布置和考慮。在設計方面我們有着專業的技術人員，在本行業有10多餘年的開發經驗；在產品加工上，我司擁有獨立的機械加工中心，其臺鑽的主要部位如電機，主軸，箱體，護罩等核心部位，均由我司自行採購原

材料加工完成，做到從源頭控制好質量，以呈現我司高品質的生產理念。

公司通過ISO9001質量管理體系認證，公司的管理也引進了相應的軟件進行一系列的規範化管理。

產品制造過程中，我們擁有五年以上機械組裝經驗的工人，並配備專業的檢驗人員，如綫檢，巡檢等，層層把關，以保證每臺機器都是通過嚴格的檢驗流程方才下綫；在其主要部位電機的檢驗上，我們有着獨立的恒溫的測試中心，配備電壓變頻器，電機參數測試儀等保證其電機數據的規範性，科學性和耐用性。行之有效的管理體系，保證了我公司每年的十多萬臺的生產能力。

公司董事長周啓富携全體員工熱忱歡迎國內外客戶蒞臨指導，商賈洽談！





Craft Precise & Accurate

工藝嚴謹周密

The manufacturing process of Youyi Tools' Products follows the requirements on industrial standard. A set of accurate and precise process has been introduced since the development of products, with careful program in every link from design, to material selection, manufacturing, assembling and operation to ensure precision. Focusing on every detail and pursuing for excellence, the spotless quality of Youyi Tools manufacturing has been presented fully.

“郵誼工具”的產品制造流程，均遵照行業規範要求，自產品開發，就將其生產納入了一套極其嚴謹、精確的流程之中，從設計、選材、制造、組裝、運行、每道環節都有周密的程序，保證精準無誤；專注于每一細微之處，追求完美，呈現“郵誼工具”制造無可挑剔的品質。




Company Honours

公司榮譽



Company Products

公司產品

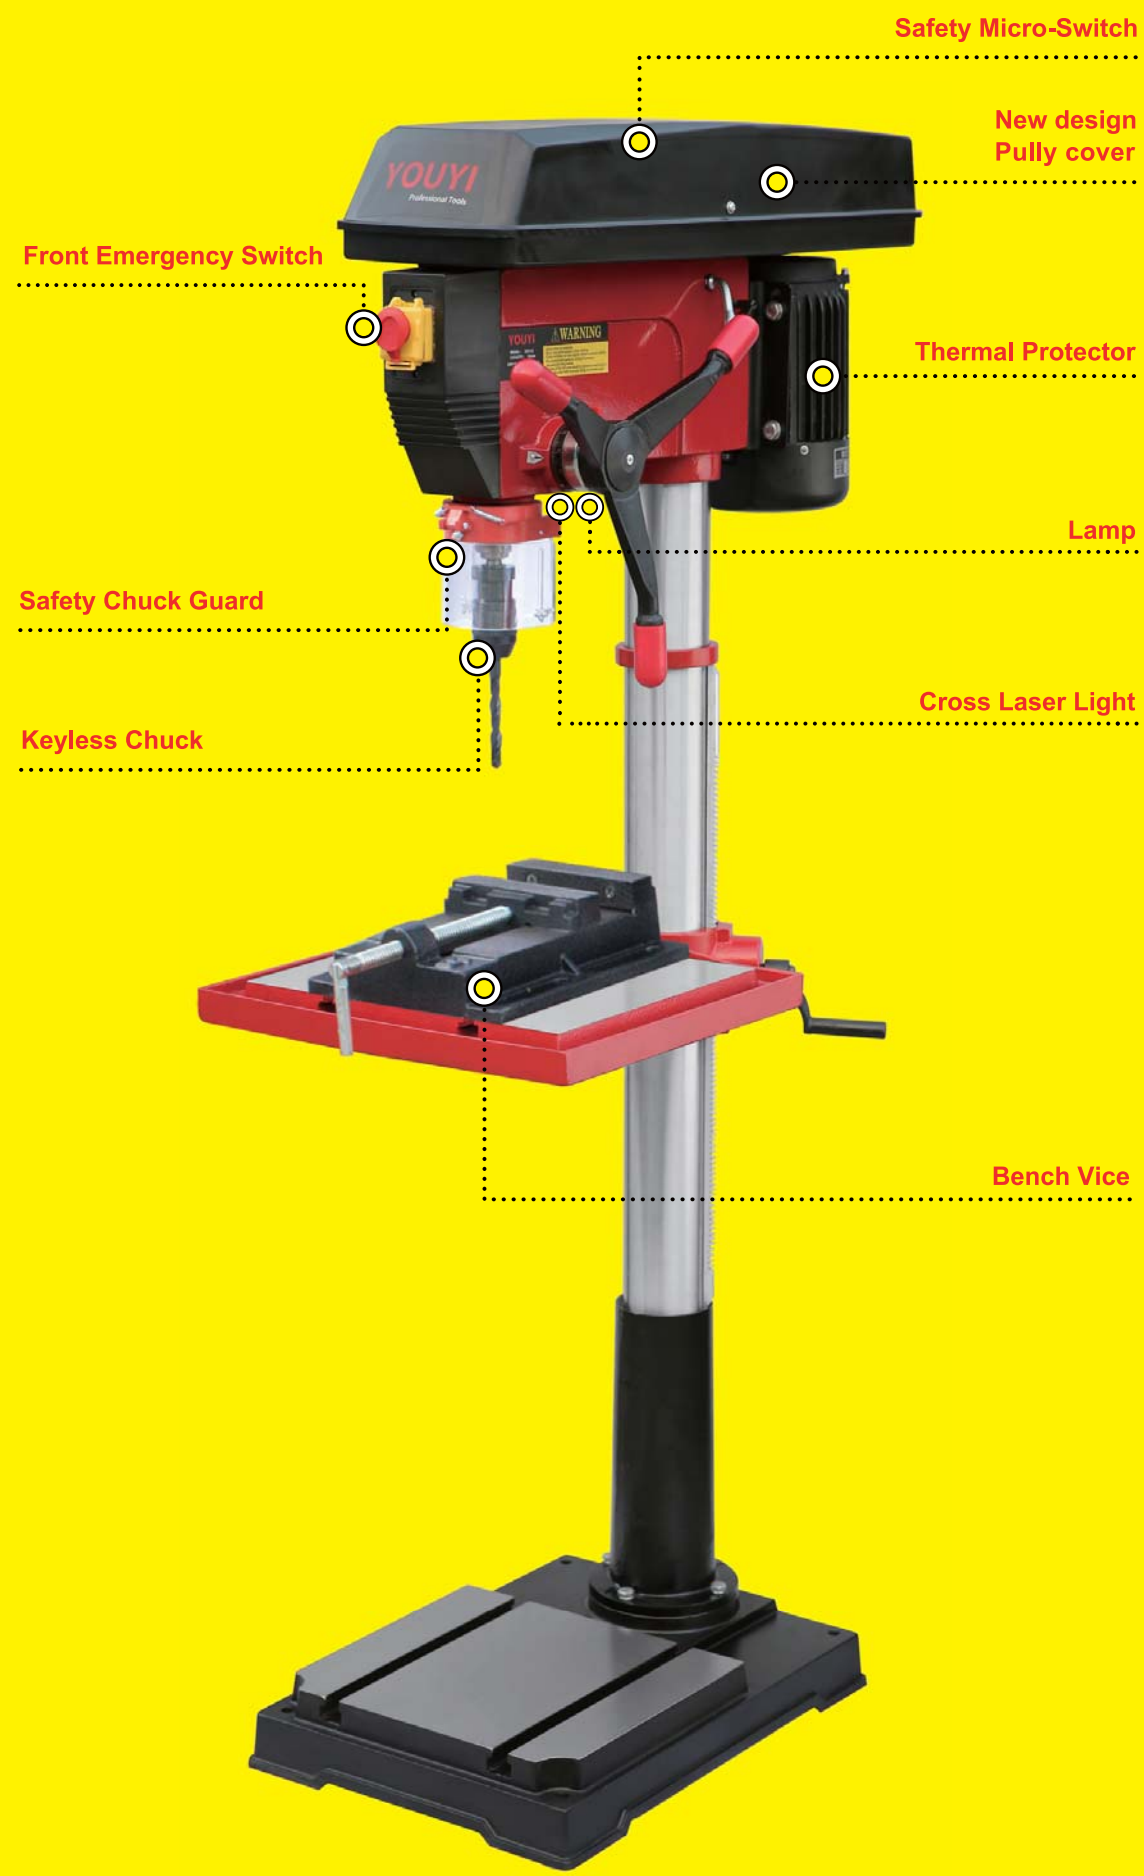

YOUYI

Professional Tools

13mm Bench Type Drill Press

- 1/2"(13mm)Max. Capacity
- 210mm Swing
- 5 Spindle Speeds
- -45°~0°~+45° Table Tilt L&R
- Optional Chuck Guard And Micro-switch For CE Requirement



Model / 型號		ZJ4113	
A	Max Drilling Diameter(mm) 鑽削直徑	Φ13mm(1/2")	
	Motor Power 電機功率	250/350W	
	Chuck Capacity(mm) 鑽夾頭	1.5-13	
B	Spindle Travel(mm) 主軸行程	50	
	Class Of Speed 鑽速級別	5	
	Speed 50/60Hz 鑽速範圍	620~2620/740~3140R.P.M.	
C	Spindle Taper 主軸錐度	B16	
D	Max. distance from spindle axis to surface of column(mm) 主軸中心到立柱表面最大距離	105	
E	Max. distance from spindle end to surface of table(mm) 主軸到工作台最大距離	220	
F	Max. distance from spindle end to surface of base(mm) 主軸到底座最大距離	300	
	Swing(mm) 旋徑	210	
	Table Size(mm) 工作台尺寸	160X160	
	Base Size(mm) 底座尺寸	300X195	
G	Column Diameter(mm) 立柱直徑	Φ 46	
H	Height(mm) 整機高度	580	
	Net Weight/Gross Weight(kg) 淨重/毛重	16/17	
	Packing Size(mm) 包裝尺寸	430X340X230	

YOUYI

Professional Tools

16mm Bench Type Drill Press

- 5/8"(16mm)Max. Capacity
- 230mm Swing
- 9 Spindle Speeds
- -45°~0°~+45° Table Tilt L&R
- Optional Chuck Guard And Micro-switch For CE Requirement



Model / 型號		ZJQ4116A	
A	Max Drilling Diameter(mm) 鑽削直徑	Φ16mm(5/8")	
	Motor Power 電機功率	450/500W	
	Chuck Capacity(mm) 鑽夾頭	3-16	
B	Spindle Travel(mm) 主軸行程	50	
	Class Of Speed 鑽速級別	9	
	Speed 50/60Hz 鑽速範圍	400~2500/480~3000R.P.M.	
C	Spindle Taper 主軸錐度	B16	
D	Max. distance from spindle axis to surface of column(mm) 主軸中心到立柱表面最大距離	115	
E	Max. distance from spindle end to surface of table(mm) 主軸到工作台最大距離	245	
F	Max. distance from spindle end to surface of base(mm) 主軸到底座最大距離	330	
	Swing(mm) 旋徑	230	
	Table Size(mm) 工作台尺寸	170X175	
	Base Size(mm) 底座尺寸	320X195	
G	Column Diameter(mm) 立柱直徑	Φ 46	
H	Height(mm) 整機高度	610	
	Net Weight/Gross Weight(kg) 淨重/毛重	21/22	
	Packing Size(mm) 包裝尺寸	465X355X225	

YOUYI

Professional Tools

13mm Bench Type Drill Press

- 1/2"(13mm)Max. Capacity
- 260mm Swing
- 5 Spindle Speeds
- -45°~0°~+45° Table Tilt L&R
- Optional Chuck Guard And Micro-switch For CE Requirement



Model / 型號		ZJ4113HA	
A	Max Drilling Diameter(mm) 鑽削直徑	Φ13mm(1/2")	
	Motor Power 電機功率	375/450/550W	
	Chuck Capacity(mm) 鑽夾頭	1.5-13	
B	Spindle Travel(mm) 主軸行程	60	
	Class Of Speed 鑽速級別	5	
	Speed 50/60Hz 鑽速範圍	620~2620/740~3140R.P.M.	
C	Spindle Taper 主軸錐度	B16	
D	Max. distance from spindle axis to surface of column(mm) 主軸中心到立柱表面最大距離	130	
E	Max. distance from spindle end to surface of table(mm) 主軸到工作台最大距離	255	
F	Max. distance from spindle end to surface of base(mm) 主軸到底座最大距離	370	
	Swing(mm) 旋徑	260	
	Table Size(mm) 工作台尺寸	200X200	
	Base Size(mm) 底座尺寸	340X210	
G	Column Diameter(mm) 立柱直徑	Φ 58	
H	Height(mm) 整機高度	680	
	Net Weight/Gross Weight(kg) 淨重/毛重	25/27	
	Packing Size(mm) 包裝尺寸	555X400X260	

YOUYI

Professional Tools

16mm Bench Type Drill Press

- 5/8"(16mm)Max. Capacity
- 260mm Swing
- 5 Spindle Speeds
- -45°~0°~+45° Table Tilt L&R
- Optional Chuck Guard And Micro-switch For CE Requirement



Model / 型號		ZJQ4116G	
A	Max Drilling Diameter(mm) 鑽削直徑	Φ16mm(5/8")	
	Motor Power 電機功率	375/450/550W	
	Chuck Capacity(mm) 鑽夾頭	3-16	
B	Spindle Travel(mm) 主軸行程	60	
	Class Of Speed 鑽速級別	5	
	Speed 50/60Hz 鑽速範圍	620~2620/740~3140R.P.M.	
C	Spindle Taper 主軸錐度	B16	
D	Max. distance from spindle axis to surface of column(mm) 主軸中心到立柱表面最大距離	130	
E	Max. distance from spindle end to surface of table(mm) 主軸到工作台最大距離	400	
F	Max. distance from spindle end to surface of base(mm) 主軸到底座最大距離	515	
	Swing(mm) 旋徑	260	
	Table Size(mm) 工作台尺寸	200X200	
	Base Size(mm) 底座尺寸	340X210	
G	Column Diameter(mm) 立柱直徑	Φ 58	
H	Height(mm) 整機高度	840	
	Net Weight/Gross Weight(kg) 淨重/毛重	28/30	
	Packing Size(mm) 包裝尺寸	665X415X260	

YOUYI

Professional Tools

16mm Bench Type Drill Press

- 5/8"(16mm)Max.Capacity
- 260mm Swing
- 5 Spindle Speeds
- -45°~0°~+45° Table Tilt L&R
- Optional Chuck Guard And Micro-switch For CE Requirement



Model / 型號		ZJQ4116K	
A	Max Drilling Diameter(mm) 鑽削直徑	Φ16mm(5/8")	
	Motor Power 電機功率	375/450/550W	
	Chuck Capacity(mm) 鑽夾頭	3-16	
B	Spindle Travel(mm) 主軸行程	60	
	Class Of Speed 鑽速級別	5	
	Speed 50/60Hz 鑽速範圍	620~2620/740~3140R.P.M.	
C	Spindle Taper 主軸錐度	B16	
D	Max. distance from spindle axis to surface of column(mm) 主軸中心到立柱表面最大距離	130	
E	Max. distance from spindle end to surface of table(mm) 主軸到工作台最大距離	400	
F	Max. distance from spindle end to surface of base(mm) 主軸到底座最大距離	515	
	Swing(mm) 旋徑	260	
	Table Size(mm) 工作台尺寸	Φ 250	
	Base Size(mm) 底座尺寸	340X210	
G	Column Diameter(mm) 立柱直徑	Φ 58	
H	Height(mm) 整機高度	840	
	Net Weight/Gross Weight(kg) 淨重/毛重	30/32	
	Packing Size(mm) 包裝尺寸	665X415X260	

YOUYI

Professional Tools

16mm Bench Type Drill Press

- 5/8"(16mm)Max.Capacity
- 260mm Swing
- 12 Spindle Speeds
- -45°~0°~+45° Table Tilt L&R
- Optional Chuck Guard And Micro-switch For CE Requirement



Model / 型號		ZJQ4116T	
A	Max Drilling Diameter(mm) 鑽削直徑	Φ16mm(5/8")	
	Motor Power 電機功率	375/450/550W	
	Chuck Capacity(mm) 鑽夾頭	3-16	
B	Spindle Travel(mm) 主軸行程	60	
	Class Of Speed 鑽速級別	12	
	Speed 50/60Hz 鑽速範圍	300~2550/360~3060R.P.M.	
C	Spindle Taper 主軸錐度	B16	
D	Max. distance from spindle axis to surface of column(mm) 主軸中心到立柱表面最大距離	130	
E	Max. distance from spindle end to surface of table(mm) 主軸到工作台最大距離	400	
F	Max. distance from spindle end to surface of base(mm) 主軸到底座最大距離	515	
	Swing(mm) 旋徑	260	
	Table Size(mm) 工作台尺寸	200X200	
	Base Size(mm) 底座尺寸	340X210	
G	Column Diameter(mm) 立柱直徑	Φ 58	
H	Height(mm) 整機高度	840	
	Net Weight/Gross Weight(kg) 淨重/毛重	29/31	
	Packing Size(mm) 包裝尺寸	665X415X260	

YOUYI

Professional Tools

16mm Bench Type Drill Press

- 5/8"(16mm)Max.Capacity
- 256mm Swing
- 12 Spindle Speeds
- -45°~0°~+45° Table Tilt L&R
- Optional Chuck Guard And Micro-switch For CE Requirement



Model / 型號		ZJQ4116Z	
A	Max Drilling Diameter(mm) 鑽削直徑	Φ16mm(5/8")	
	Motor Power 電機功率	450W	
	Chuck Capacity(mm) 鑽夾頭	3-16	
B	Spindle Travel(mm) 主軸行程	60	
	Class Of Speed 鑽速級別	12	
	Speed 50/60Hz 鑽速範圍	250~2400/300~2880R.P.M.	
C	Spindle Taper 主軸錐度	MT2	
D	Max. distance from spindle axis to surface of column(mm) 主軸中心到立柱表面最大距離	128	
E	Max. distance from spindle end to surface of table(mm) 主軸到工作台最大距離	410	
F	Max. distance from spindle end to surface of base(mm) 主軸到底座最大距離	530	
	Swing(mm) 旋徑	256	
	Table Size(mm) 工作台尺寸	200X200	
	Base Size(mm) 底座尺寸	355X235	
G	Column Diameter(mm) 立柱直徑	Φ 60	
H	Height(mm) 整機高度	840	
	Net Weight/Gross Weight(kg) 淨重/毛重	32/34	
	Packing Size(mm) 包裝尺寸	665X430X255	

YOUYI

Professional Tools

16mm Bench Type Drill Press

- 5/8"(16mm)Max.Capacity
- 310mm Swing
- 12 Spindle Speeds
- -45°~0°~+45° Table Tilt L&R
- Optional Chuck Guard And Micro-switch For CE Requirement



Model / 型號		ZJQ4116B	
A	Max Drilling Diameter(mm) 鑽削直徑	Φ16mm(5/8")	
	Motor Power 電機功率	375/450/550W	
	Chuck Capacity(mm) 鑽夾頭	3-16	
B	Spindle Travel(mm) 主軸行程	60	
	Class Of Speed 鑽速級別	12	
	Speed 50/60Hz 鑽速範圍	300~2550/360~3060R.P.M.	
C	Spindle Taper 主軸錐度	MT2	
D	Max. distance from spindle axis to surface of column(mm) 主軸中心到立柱表面最大距離	155	
E	Max. distance from spindle end to surface of table(mm) 主軸到工作台最大距離	490	
F	Max. distance from spindle end to surface of base(mm) 主軸到底座最大距離	610	
	Swing(mm) 旋徑	310	
	Table Size(mm) 工作台尺寸	Φ 260	
	Base Size(mm) 底座尺寸	420X250	
G	Column Diameter(mm) 立柱直徑	Φ 58	
H	Height(mm) 整機高度	900	
	Net Weight/Gross Weight(kg) 淨重/毛重	34/36	
	Packing Size(mm) 包裝尺寸	770X450X260	

YOUYI

Professional Tools

16mm Bench Type Drill Press

- 5/8"(16mm)Max. Capacity
- 325mm Swing
- 16 Spindle Speeds
- -45°~0°~+45° Table Tilt L&R
- Optional Chuck Guard And Micro-switch For CE Requirement



Model / 型號		ZJQ4116	
A	Max Drilling Diameter(mm) 鑽削直徑	Φ16mm(5/8")	
	Motor Power 電機功率	375/450/550W	
	Chuck Capacity(mm) 鑽夾頭	3-16	
B	Spindle Travel(mm) 主軸行程	80	
	Class Of Speed 鑽速級別	16	
	Speed 50/60Hz 鑽速範圍	180~2770/220~3320R.P.M.	
C	Spindle Taper 主軸錐度	MT2	
D	Max. distance from spindle axis to surface of column(mm) 主軸中心到立柱表面最大距離	162.5	
E	Max. distance from spindle end to surface of table(mm) 主軸到工作台最大距離	450	
F	Max. distance from spindle end to surface of base(mm) 主軸到底座最大距離	630	
	Swing(mm) 旋徑	325	
	Table Size(mm) 工作台尺寸	Φ 290	
	Base Size(mm) 底座尺寸	420X250	
G	Column Diameter(mm) 立柱直徑	Φ 72	
H	Height(mm) 整機高度	980	
	Net Weight/Gross Weight(kg) 淨重/毛重	42/45	
	Packing Size(mm) 包裝尺寸	770X450X260	

YOUYI

Professional Tools

16mm Bench Type Drill Press

- 5/8"(16mm)Max. Capacity
- 360mm Swing
- 16 Spindle Speeds
- -45°~0°~+45° Table Tilt L&R
- Optional Chuck Guard And Micro-switch For CE Requirement



Model / 型號		ZJ4116H	
A	Max Drilling Diameter(mm) 鑽削直徑	Φ16mm(5/8")	
	Motor Power 電機功率	375/450/550W	
	Chuck Capacity(mm) 鑽夾頭	3-16	
B	Spindle Travel(mm) 主軸行程	85	
	Class Of Speed 鑽速級別	16	
	Speed 50/60Hz 鑽速範圍	180~2770/220~3320R.P.M.	
C	Spindle Taper 主軸錐度	MT2	
D	Max. distance from spindle axis to surface of column(mm) 主軸中心到立柱表面最大距離	180	
E	Max. distance from spindle end to surface of table(mm) 主軸到工作台最大距離	410	
F	Max. distance from spindle end to surface of base(mm) 主軸到底座最大距離	600	
	Swing(mm) 旋徑	360	
	Table Size(mm) 工作台尺寸	290X290	
	Base Size(mm) 底座尺寸	460X270	
G	Column Diameter(mm) 立柱直徑	Φ 72	
H	Height(mm) 整機高度	1000	
	Net Weight/Gross Weight(kg) 淨重/毛重	55/57	
	Packing Size(mm) 包裝尺寸	810X490X270	

YOUYI

Professional Tools

20mm Bench Type Drill Press

- 3/4"(20mm)Max.Capacity
- 325mm Swing
- 16 Spindle Speeds
- -45°~0°~+45° Table Tilt L&R
- Optional Chuck Guard And Micro-switch For CE Requirement



YOUYI

Professional Tools

20mm Bench Type Drill Press

- 3/4"(20mm)Max.Capacity
- 360mm Swing
- 16 Spindle Speeds
- -45°~0°~+45° Table Tilt L&R
- Optional Chuck Guard And Micro-switch For CE Requirement



Model / 型號		ZJQ4120	
A	Max Drilling Diameter(mm) 鑽削直徑	Φ20mm(3/4")	
	Motor Power 電機功率	450/550/750W	
	Chuck Capacity(mm) 鑽夾頭	5-20	
B	Spindle Travel(mm) 主軸行程	80	
	Class Of Speed 鑽速級別	16	
	Speed 50/60Hz 鑽速範圍	180~2770/220~3320R.P.M.	
C	Spindle Taper 主軸錐度	MT2	
D	Max. distance from spindle axis to surface of column(mm) 主軸中心到立柱表面最大距離	162.5	
E	Max. distance from spindle end to surface of table(mm) 主軸到工作台最大距離	420	
F	Max. distance from spindle end to surface of base(mm) 主軸到底座最大距離	630	
	Swing(mm) 旋徑	325	
	Table Size(mm) 工作台尺寸	250X250	
	Base Size(mm) 底座尺寸	420X250	
G	Column Diameter(mm) 立柱直徑	Φ 72	
H	Height(mm) 整機高度	980	
	Net Weight/Gross Weight(kg) 淨重/毛重	44/47	
	Packing Size(mm) 包裝尺寸	770X450X260	

Model / 型號		ZJ4120	
A	Max Drilling Diameter(mm) 鑽削直徑	Φ20mm(3/4")	
	Motor Power 電機功率	450/550/750W	
	Chuck Capacity(mm) 鑽夾頭	5-20	
B	Spindle Travel(mm) 主軸行程	85	
	Class Of Speed 鑽速級別	16	
	Speed 50/60Hz 鑽速範圍	180~2770/220~3320R.P.M.	
C	Spindle Taper 主軸錐度	MT2	
D	Max. distance from spindle axis to surface of column(mm) 主軸中心到立柱表面最大距離	180	
E	Max. distance from spindle end to surface of table(mm) 主軸到工作台最大距離	620	
F	Max. distance from spindle end to surface of base(mm) 主軸到底座最大距離	810	
	Swing(mm) 旋徑	360	
	Table Size(mm) 工作台尺寸	290X290	
	Base Size(mm) 底座尺寸	460X270	
G	Column Diameter(mm) 立柱直徑	Φ 72	
H	Height(mm) 整機高度	1200	
	Net Weight/Gross Weight(kg) 淨重/毛重	58/60	
	Packing Size(mm) 包裝尺寸	1010X490X275	

YOUYI

Professional Tools

16mm Floor Type Drill Press

- 5/8"(16mm)Max.Capacity
- 325mm Swing
- 16 Spindle Speeds
- -45°~0°~+45° Table Tilt L&R
- Optional Chuck Guard And Micro-switch For CE Requirement



Model / 型號		ZJQ5116	
A	Max Drilling Diameter(mm) 鑽削直徑	Φ16mm(5/8")	
	Motor Power 電機功率	375/450/550W	
	Chuck Capacity(mm) 鑽夾頭	3-16	
B	Spindle Travel(mm) 主軸行程	80	
	Class Of Speed 鑽速級別	16	
	Speed 50/60Hz 鑽速範圍	180~2770/220~3320R.P.M.	
C	Spindle Taper 主軸錐度	MT2	
D	Max. distance from spindle axis to surface of column(mm) 主軸中心到立柱表面最大距離	162.5	
E	Max. distance from spindle end to surface of table(mm) 主軸到工作台最大距離	725	
F	Max. distance from spindle end to surface of base(mm) 主軸到底座最大距離	1205	
	Swing(mm) 旋徑	325	
	Table Size(mm) 工作台尺寸	Φ 290	
	Base Size(mm) 底座尺寸	460X270	
G	Column Diameter(mm) 立柱直徑	Φ 72	
H	Height(mm) 整機高度	1580	
	Net Weight/Gross Weight(kg) 淨重/毛重	55/58	
	Packing Size(mm) 包裝尺寸	1110X450X275	

YOUYI

Professional Tools

16mm Floor Type Drill Press

- 5/8"(16mm)Max.Capacity
- 360mm Swing
- 16 Spindle Speeds
- -45°~0°~+45° Table Tilt L&R
- Optional Chuck Guard And Micro-switch For CE Requirement



Model / 型號		ZJ5116	
A	Max Drilling Diameter(mm) 鑽削直徑	Φ16mm(5/8")	
	Motor Power 電機功率	375/450/550W	
	Chuck Capacity(mm) 鑽夾頭	3-16	
B	Spindle Travel(mm) 主軸行程	85	
	Class Of Speed 鑽速級別	16	
	Speed 50/60Hz 鑽速範圍	180~2770/220~3320R.P.M.	
C	Spindle Taper 主軸錐度	MT2	
D	Max. distance from spindle axis to surface of column(mm) 主軸中心到立柱表面最大距離	180	
E	Max. distance from spindle end to surface of table(mm) 主軸到工作台最大距離	685	
F	Max. distance from spindle end to surface of base(mm) 主軸到底座最大距離	1175	
	Swing(mm) 旋徑	360	
	Table Size(mm) 工作台尺寸	290X290	
	Base Size(mm) 底座尺寸	460X270	
G	Column Diameter(mm) 立柱直徑	Φ 72	
H	Height(mm) 整機高度	1600	
	Net Weight/Gross Weight(kg) 淨重/毛重	66/70	
	Packing Size(mm) 包裝尺寸	1140X490X275	

YOUYI

Professional Tools

20mm Floor Type Drill Press

- 3/4"(20mm)Max.Capacity
- 325mm Swing
- 16 Spindle Speeds
- -45°~0°~+45° Table Tilt L&R
- Optional Chuck Guard And Micro-switch For CE Requirement



Model / 型號		ZJQ5120	
A	Max Drilling Diameter(mm) 鑽削直徑	Φ20mm(3/4")	
	Motor Power 電機功率	450/550/750W	
	Chuck Capacity(mm) 鑽夾頭	5-20	
B	Spindle Travel(mm) 主軸行程	80	
	Class Of Speed 鑽速級別	16	
	Speed 50/60Hz 鑽速範圍	180~2770/220~3320R.P.M.	
C	Spindle Taper 主軸錐度	MT2	
D	Max. distance from spindle axis to surface of column(mm) 主軸中心到立柱表面最大距離	162.5	
E	Max. distance from spindle end to surface of table(mm) 主軸到工作台最大距離	725	
F	Max. distance from spindle end to surface of base(mm) 主軸到底座最大距離	1205	
	Swing(mm) 旋徑	325	
	Table Size(mm) 工作台尺寸	250X250	
	Base Size(mm) 底座尺寸	460X270	
G	Column Diameter(mm) 立柱直徑	Φ 72	
H	Height(mm) 整機高度	1580	
	Net Weight/Gross Weight(kg) 淨重/毛重	57/60	
	Packing Size(mm) 包裝尺寸	1110X450X275	

YOUYI

Professional Tools

20mm Floor Type Drill Press

- 3/4"(20mm)Max.Capacity
- 360mm Swing
- 16 Spindle Speeds
- -45°~0°~+45° Table Tilt L&R
- Optional Chuck Guard And Micro-switch For CE Requirement



Model / 型號		ZJ5120	
A	Max Drilling Diameter(mm) 鑽削直徑	Φ20mm(3/4")	
	Motor Power 電機功率	450/550/750W	
	Chuck Capacity(mm) 鑽夾頭	5-20	
B	Spindle Travel(mm) 主軸行程	85	
	Class Of Speed 鑽速級別	16	
	Speed 50/60Hz 鑽速範圍	180~2770/220~3320R.P.M.	
C	Spindle Taper 主軸錐度	MT2	
D	Max. distance from spindle axis to surface of column(mm) 主軸中心到立柱表面最大距離	180	
E	Max. distance from spindle end to surface of table(mm) 主軸到工作台最大距離	685	
F	Max. distance from spindle end to surface of base(mm) 主軸到底座最大距離	1175	
	Swing(mm) 旋徑	360	
	Table Size(mm) 工作台尺寸	290X290	
	Base Size(mm) 底座尺寸	460X270	
G	Column Diameter(mm) 立柱直徑	Φ 72	
H	Height(mm) 整機高度	1600	
	Net Weight/Gross Weight(kg) 淨重/毛重	68/72	
	Packing Size(mm) 包裝尺寸	1140X490X275	

YOUYI

Professional Tools

25mm Floor Type Drill Press

- 1"(25mm)Max.Capacity
- 352mm Swing
- 12 Spindle Speeds
- -45°~0°~+45° Table Tilt L&R
- Cast Iron Handle
- Optional Chuck Guard And Micro-switch For CE Requirement



Model / 型號		ZJQ5125	
A	Max Drilling Diameter(mm) 鑽削直徑	Φ25mm(1")	
	Motor Power 電機功率	750/900W	
	Chuck Capacity(mm) 鑽夾頭	5-20	
B	Spindle Travel(mm) 主軸行程	85	
	Class Of Speed 鑽速級別	12	
	Speed 50/60Hz 鑽速範圍	280~2380/340~2860R.P.M.	
C	Spindle Taper 主軸錐度	MT3	
D	Max. distance from spindle axis to surface of column(mm) 主軸中心到立柱表面最大距離	176	
E	Max. distance from spindle end to surface of table(mm) 主軸到工作台最大距離	685	
F	Max. distance from spindle end to surface of base(mm) 主軸到底座最大距離	1175	
	Swing(mm) 旋徑	352	
	Table Size(mm) 工作台尺寸	290X290	
	Base Size(mm) 底座尺寸	460X270	
G	Column Diameter(mm) 立柱直徑	Φ 80	
H	Height(mm) 整機高度	1600	
	Net Weight/Gross Weight(kg) 淨重/毛重	71/75	
	Packing Size(mm) 包裝尺寸	1140X490X275	

YOUYI

Professional Tools

25mm Floor Type Drill Press

- 1"(25mm)Max.Capacity
- 440mm Swing
- 12 Spindle Speeds
- -45°~0°~+45° Table Tilt L&R
- Cast Iron Handle
- Optional Chuck Guard And Micro-switch For CE Requirement



Model / 型號		ZJ5125	
A	Max Drilling Diameter(mm) 鑽削直徑	Φ25mm(1")	
	Motor Power 電機功率	1100/1500W	
	Chuck Capacity(mm) 鑽夾頭	5-20	
B	Spindle Travel(mm) 主軸行程	120	
	Class Of Speed 鑽速級別	12	
	Speed 50/60Hz 鑽速範圍	150~2450/180~2940R.P.M.	
C	Spindle Taper 主軸錐度	MT3	
D	Max. distance from spindle axis to surface of column(mm) 主軸中心到立柱表面最大距離	220	
E	Max. distance from spindle end to surface of table(mm) 主軸到工作台最大距離	765	
F	Max. distance from spindle end to surface of base(mm) 主軸到底座最大距離	1225	
	Swing(mm) 旋徑	440	
	Table Size(mm) 工作台尺寸	350X350	
	Base Size(mm) 底座尺寸	470X360	
G	Column Diameter(mm) 立柱直徑	Φ 92	
H	Height(mm) 整機高度	1710	
	Net Weight/Gross Weight(kg) 淨重/毛重	106/110	
	Packing Size(mm) 包裝尺寸	1415X650X305	

YOUYI

Professional Tools

32mm Floor Type Drill Press

- 1-1/4"(32mm)Max.Capacity
- 440mm Swing
- 12 Spindle Speeds
- -45°~0°~+45° Table Tilt L&R
- Cast Iron Handle
- Optional Chuck Guard And Micro-switch For CE Requirement



Model / 型號		ZJQ5132	
A	Max Drilling Diameter(mm) 鑽削直徑	Φ32mm(1-1/4")	
	Motor Power 電機功率	1100/1500W	
	Chuck Capacity(mm) 鑽夾頭	5-20	
B	Spindle Travel(mm) 主軸行程	120	
	Class Of Speed 鑽速級別	12	
	Speed 50/60Hz 鑽速範圍	150~2450/180~2940R.P.M.	
C	Spindle Taper 主軸錐度	MT4	
D	Max. distance from spindle axis to surface of column(mm) 主軸中心到立柱表面最大距離	220	
E	Max. distance from spindle end to surface of table(mm) 主軸到工作台最大距離	700	
F	Max. distance from spindle end to surface of base(mm) 主軸到底座最大距離	1225	
	Swing(mm) 旋徑	440	
	Table Size(mm) 工作台尺寸	360X360	
	Base Size(mm) 底座尺寸	470X360	
G	Column Diameter(mm) 立柱直徑	Φ 92	
H	Height(mm) 整機高度	1710	
	Net Weight/Gross Weight(kg) 淨重/毛重	115/120	
	Packing Size(mm) 包裝尺寸	1415X650X305	

YOUYI

Professional Tools

32mm Floor Type Drill Press

- 1-1/4"(32mm)Max.Capacity
- 510mm Swing
- 12 Spindle Speeds
- -45°~0°~+45° Table Tilt L&R
- Cast Iron Handle
- Optional Chuck Guard And Micro-switch For CE Requirement



Model / 型號		ZJ5132	
A	Max Drilling Diameter(mm) 鑽削直徑	Φ32mm(1-1/4")	
	Motor Power 電機功率	1100/1500W	
	Chuck Capacity(mm) 鑽夾頭	5-20	
B	Spindle Travel(mm) 主軸行程	120	
	Class Of Speed 鑽速級別	12	
	Speed 50/60Hz 鑽速範圍	150~2450/180~2940R.P.M.	
C	Spindle Taper 主軸錐度	MT4	
D	Max. distance from spindle axis to surface of column(mm) 主軸中心到立柱表面最大距離	255	
E	Max. distance from spindle end to surface of table(mm) 主軸到工作台最大距離	745	
F	Max. distance from spindle end to surface of base(mm) 主軸到底座最大距離	1205	
	Swing(mm) 旋徑	510	
	Table Size(mm) 工作台尺寸	420X480	
	Base Size(mm) 底座尺寸	575X425	
G	Column Diameter(mm) 立柱直徑	Φ 92	
H	Height(mm) 整機高度	1710	
	Net Weight/Gross Weight(kg) 淨重/毛重	125/130	
	Packing Size(mm) 包裝尺寸	1415X650X305	



Model / 型號	MK361Q	MK361A
Motor Power 電機功率	750W	750W
Spindle Speed 轉速	2840 R.P.M.	2840 R.P.M.
Chisel Capacity(mm) 開榫刀	3/8 inch / 9.53mm	3/8 inch / 9.53mm
Drill Chuck Capacity(mm) 鑽夾頭	13	13
Max. Clamping Width(mm) 最大夾持範圍	100	100
Vertical Stroke(mm) 垂直工作行程	60	60
Lateral Stroke(mm) 左右工作行程	140	140
Fence Size(mm) 擋板尺寸	200X60	200X60
Table Size(mm) 工作臺尺寸	200X160	200X160
Base Size(mm) 底座尺寸	310X250	310X250
Column Diameter(mm) 立柱直徑	Φ 66	Φ 70
Overall Height(mm) 整機高度	730	730
Net Weight/Gross Weight(kg) 淨重/毛重	45/48	48/51
Packing Size(mm) 包裝尺寸	495X305X220/435X305X240	495X305X220/435X305X240



J1C-23S
J1C-25S

J1C-23R
J1C-25R

J1C-32B

Model / 型號	J1C-23S	J1C-23R	J1C-25S	J1C-25R	J1C-32B
Max Drilling Diameter(mm) 鑽削直徑	23mm	23mm	25mm	25mm	32mm
Motor Power(W) 電機功率	1000W	1000W	1200W	1200W	1600W
Magnet Attraction(N) 電磁吸力	11000N	11000N	12500N	12500N	15500N
Spindle Travel(mm) 主軸行程	180mm	180mm	180mm	180mm	230mm
Spindle Taper 主軸錐度	MT2	MT2	MT3	MT3	MT4
Spindle Speed 主軸鑽速	270R.P.M.	270R.P.M.	270R.P.M.	270R.P.M.	190R.P.M.
Net Weight/Gross Weight(kg) 淨重/毛重	24/32	24/32	26/34	26/34	55/60
Packing Size(mm) 包裝尺寸	375X175X420mm	375X175X420mm	375X175X420mm	375X175X420mm	510X200X540mm

YOUYI

Professional Tools



MD3212-1(5'')



MD3215(6'')



MD3215S(6'')



MD3220(8'')



MD3215F(6'')



MD3220B(8'')

Model / 型號	MD3212-1(5'')	MD3215(6'')	MD3215S(6'')	MD3220(8'')	MD3215F(6'')	MD3220B(8'')
Motor Power(W) 電機功率	120W	150W	200/250/350W	300/350W	250W	250/350W
Speed 50/60Hz 鑽速	2840/3560R.P.M.	2840/3560R.P.M.	2840/3560R.P.M.	2840/3560R.P.M.	2840/3560R.P.M.	2840/3560R.P.M.
Wheel Size(mm) 砂輪尺寸	Φ125X16X12.7mm	Φ150X16X12.7mm	Φ150X16X12.7mm	Φ200X20X16mm	Φ150X16X12.7mm	Φ200X20X16mm
Net Weight/Gross Weight(kg) 淨重/毛重	4.5/5	5/5.5	8/9	11/12	6.5/7	11/12
Packing Size(mm) 包裝尺寸	295X185X215mm	295X185X215mm	365X205X250mm	370X240X280mm	350X185X245mm	365X240X285mm

YOUYI

Professional Tools



Options and Accessories for Drill Press



Key-type Drill Chuck / 帶鑰匙鑽夾頭

Model 型號	YY-2001	YY-2002	YY-2003	YY-2004
Specification 規格	J2513-B16	J2516-B16	J2116-B18	J2120-B22
Chuck Capacity(mm) 夾持範圍	1.5-13mm	3-16mm	1-16mm	5-20mm
Taper 錐度	B16	B16	B18	B22



Keyless Automatic Duty Drill Chuck/自鎖鑽夾頭

Model 型號	YY-3001	YY-3002	YY-3003
Chuck Capacity(mm) 夾持範圍	1-13mm	3-16mm	5-20mm
Taper 錐度	B16	B16	B22



Heavy Duty Key-type Drill Chuck/工業用高精度鑽夾頭

Model 型號	YY-4001	YY-4002	YY-4003	YY-4004
Specification 規格	J2113B-B16	J2316B-B16	J2316B-B18	J2220B-B22
Chuck Capacity(mm) 夾持範圍	1-13mm	3-16mm	3-16mm	5-20mm
Taper 錐度	B16	B16	B18	B22

Chuck Guard / 防護鏡



Φ 40mm

PS/PC



Φ 55mm

PS/PC



Φ 65mm

PS/PC



Φ 75mm

PS/PC

YOUYI

Professional Tools



Options and Accessories for Drill Press



American Type Bench Vice / 美式平口鉗

Size 尺寸	2.5"	3"	4"	5"	6"
Jaw Width(mm) 鉗口寬度	63mm	75mm	100mm	125mm	150mm
Jaw Opening(mm) 鉗口行程	50mm	60mm	80mm	100mm	120mm

Morse Taper Arbor / 錐度連接桿



Model 型號	YY-1001	YY-1002	YY-1003	YY-1004	YY-1005	YY-1006	YY-1007	YY-1008
Specification 規格	MT2-B16	MT2-B18	MT2-B22	MT2-JT3	MT3-B16	MT3-B22	MT4-B16	MT4-B22

Mortising Cutter / 打榫刀



Model 型號	YY-5001	YY-5002
Specification 規格	1/2 inch / 12.7mm	3/8 inch / 9.53mm

YOUYI

Professional Tools



Options and Accessories for Drill Press

Motor / 電機



- 63 Type Steel Plate Enclosure Motor
63鋼板外殼電機
- 250W/350W



- 71 Type Cast Iron/Aluminium Enclosure Motor
71鑄鐵/鑄鋁外殼電機
- 375W/450W/550W/650W*



- 88 Type Cast Iron Enclosure Motor/
88鑄鐵外殼電機
- 550W/750W/900W



- 90 Type Cast Iron Enclosure Motor
90鑄鐵外殼電機
- 1100W/1500W

Cross Laser light / 激光燈



(2XAAA Battery)